

OVERVIEW

MOTOR SPECIFICATIONS

FIELDBUS OPTIONS

BRAKE OPTIONS

CONNECTIVITY

PERIPHERALS

POWER SUPPLIES & SHUNTS

GEAR HEADS


SOFTWARE


APPENDIX

SM1720D-PLS2		
Continuous Torque	2.08	in-lb
	33	oz-in
	0.24	N-m
Peak Torque	3.82	in-lb
	61	oz-in
	0.43	N-m
Nominal Continuous Power	145	Watt
No Load Speed	7,900	RPM
Continuous Current @ Nominal Power	4.5	Amps
Voltage Constant	5.5	V/kRPM
Winding Resistance	1.8	ohms
Encoder Resolution	4,000	Counts/Rev
Rotor Inertia	0.00026	oz-in-sec <sup>2</sup>
	0.184	10 <sup>-6</sup> Kg-m <sup>2</sup>
Weight	1.2	lb
	0.55	kg
Shaft Diameter	0.197	in
	5.00	mm
Shaft, Radial Load	7	lb
	3.18	kg
Shaft, Axial Thrust Load	3	lb
	1.36	kg
EtherNet Available		
DeviceNet Available		
ProfiBus Available		
CanOpen Available		




## Animatics SmartMotor SM1720D-PLS2 (No Options) CAD Drawing

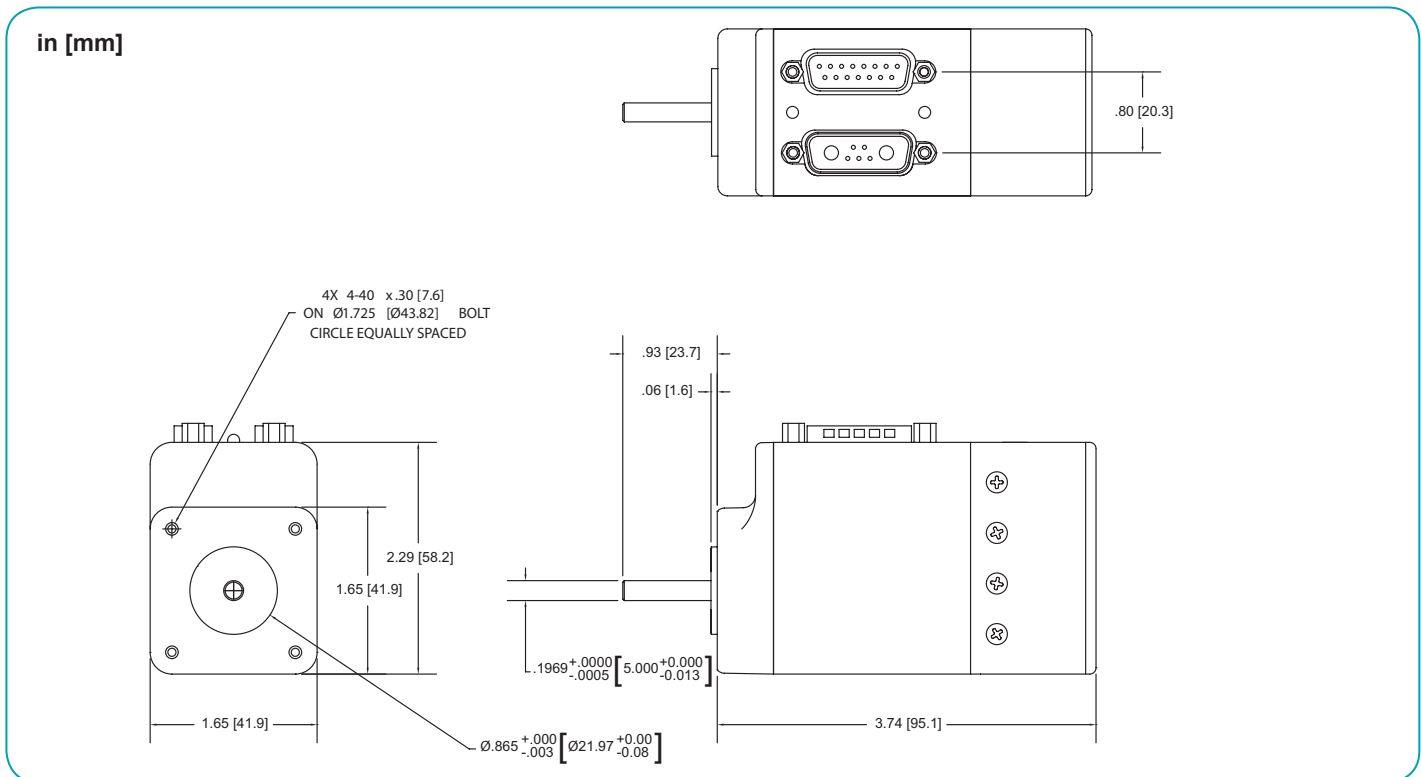


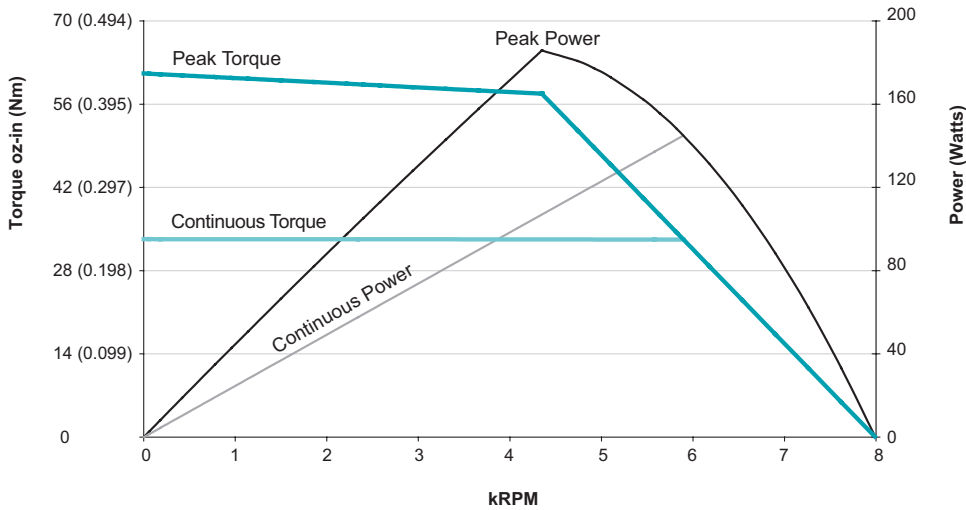

**SM1720D-PLS2  
at 48 VDC  
at rise to 85°C**

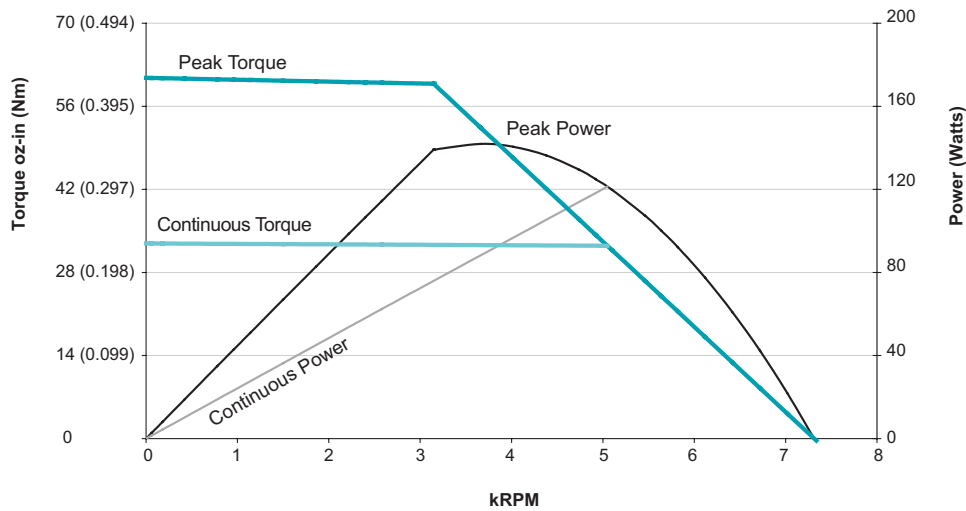

**SM1720D-PLS2  
at 42 VDC  
at rise to 85°C**

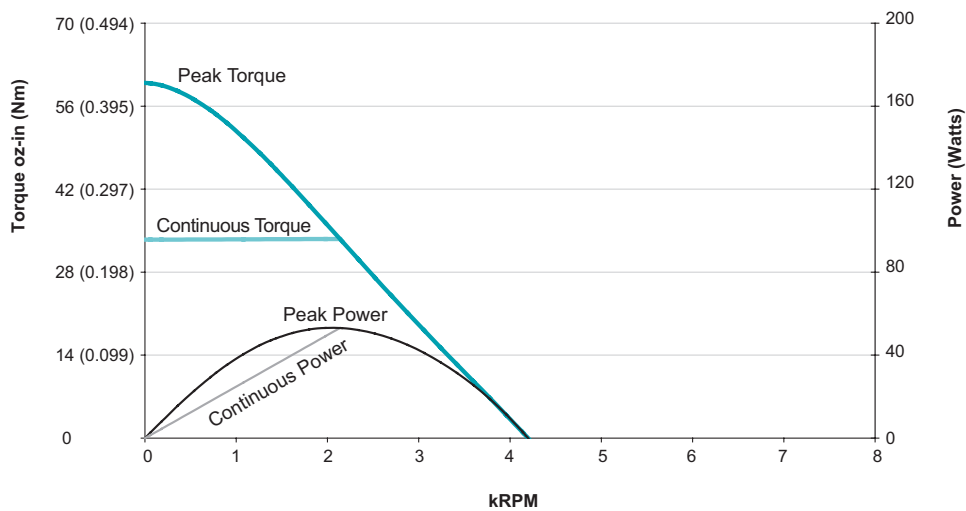

**SM1720D-PLS2  
at 24 VDC  
at rise to 85°C**