

SM17205D		
Continuous Torque	2.08	in-lb
	33	oz-in
	0.24	N-m
Peak Torque	3.82	in-lb
	61	oz-in
	0.43	N-m
Nominal Continuous Power	145	Watt
No Load Speed	7,900	RPM
Max. Continuous Current* @ 6000 RPM	3.81	Amps
Peak Power @ 4200 RPM	185	Watts
Voltage Constant	6.506	V/kRPM
Inductance	1.4	mH
Encoder Resolution	4,000	Counts/Rev
Rotor Inertia	0.00217	oz-in-sec ²
	1.5325	10 ⁻⁵ Kg-m ²
Weight	1.2	lb
	0.55	kg
Shaft Diameter	0.197	in
	5.00	mm
Shaft, Radial Load	7	lb
	3.18	kg
Shaft, Axial Thrust Load	3	lb
	1.36	kg
DeviceNet Available	Yes	
PROFIBUS Available		
CANopen Available	Yes	

*Default voltage is 48V. See graphs for additional voltages.




Operating temperature range: 0°C–85°C
Storage temperature range: -10°C–85°C, noncondensing


NOTE: Motor specifications are subject to changes without notice. Consult website and factory for latest data.




Moog Animatics SmartMotor™ SM17205D (No Options) CAD Drawing

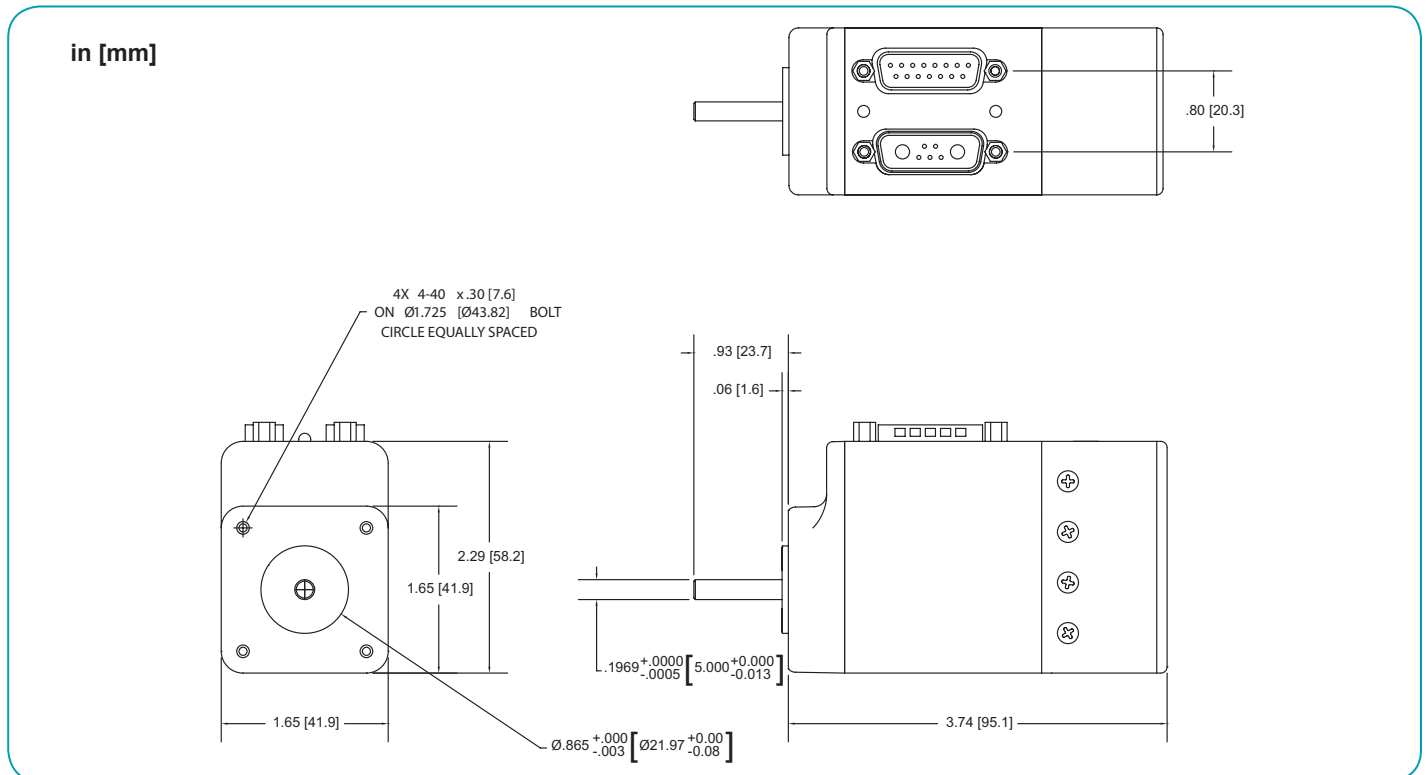


- OVERVIEW
- SOFTWARE
- D-STYLE MOTORS
- D-STYLE CONNECTIVITY
- PERIPHERALS
- M-STYLE MOTORS
- M-STYLE CONNECTIVITY
- LINEAR SYSTEMS
- POWER SUPPLIES & SHUNTS
- GEAR HEADS
- APPENDIX

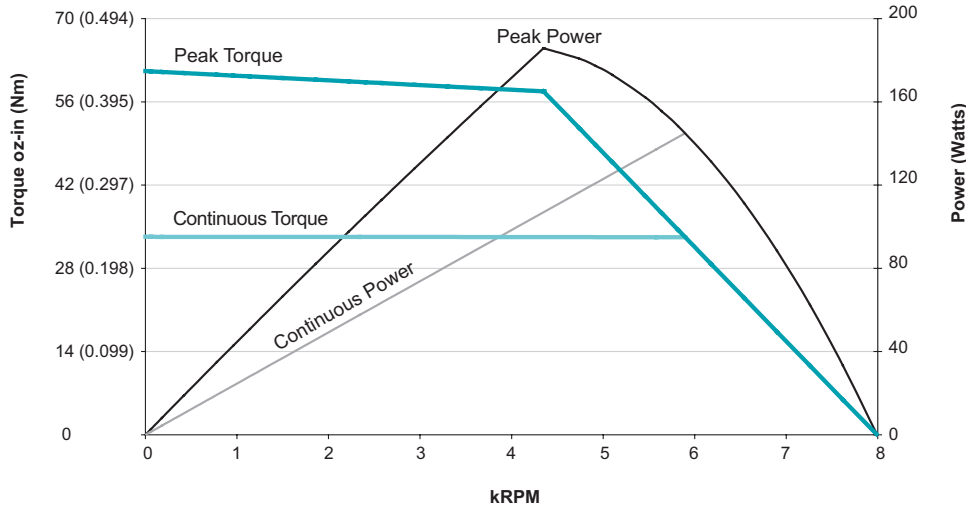

**SM17205D
at 48 VDC
at rise to 85°C**

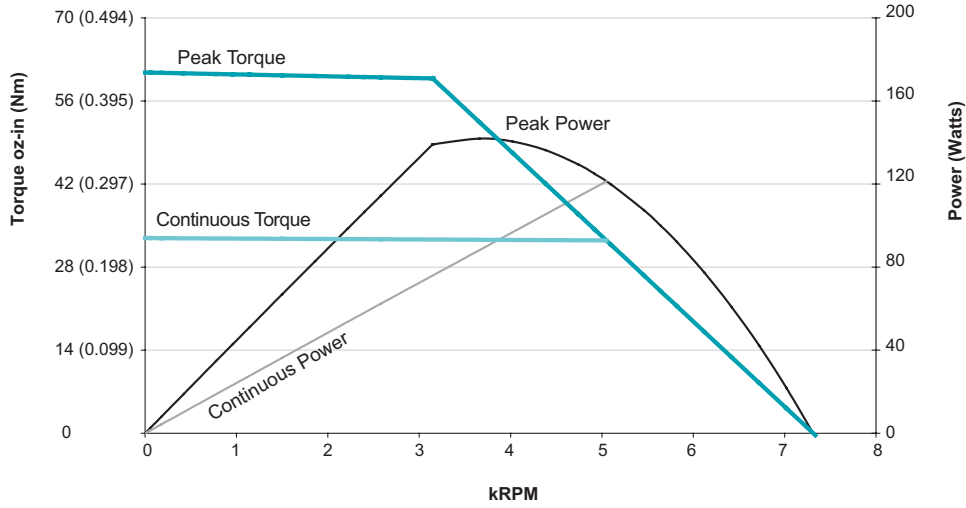

**SM17205D
at 42 VDC
at rise to 85°C**

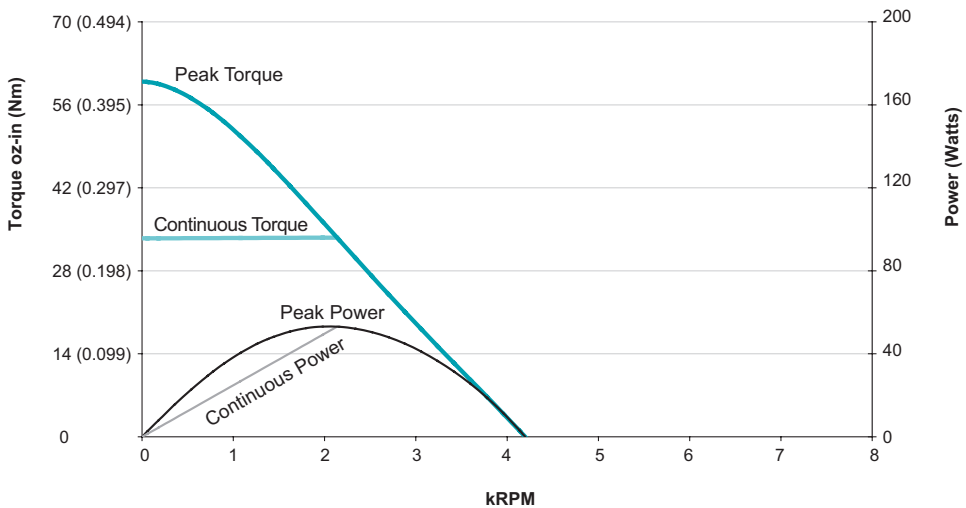

**SM17205D
at 24 VDC
at rise to 85°C**

All torque curves based on 25°C ambient. Motors were operated using MDT (Trapezoidal Drive Mode) Commutation. For ambient temperatures above 25°C, Continuous Torque must be linearly derated to 0% at 85°C.