


CAN Bus Y Cables, Right Angle Connector

The CAN Y1 series is intended for CAN bus communications connectivity between two motors with addition of a T-connector in line. Rated to >1MB data transmission rate.


This allows for cascading of multiple SmartMotor servos and the addition of a shunt resistor when required.

CBLIP series cables are sealed M12 threaded connector brass pins with gold plating, maximum 4.0A 250V foil shield with black PVC jacket ~7.4mm diameter.

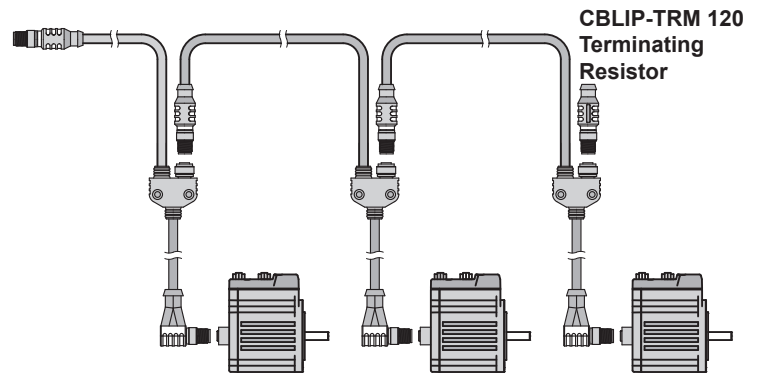

Right Angle Connector

Part Number	Length
CBLIP-CAN-Y1-0.5MRA	0.5 meters
CBLIP-CAN-Y1-1MRA	1 meters
CBLIP-CAN-Y1-3MRA	3 meters

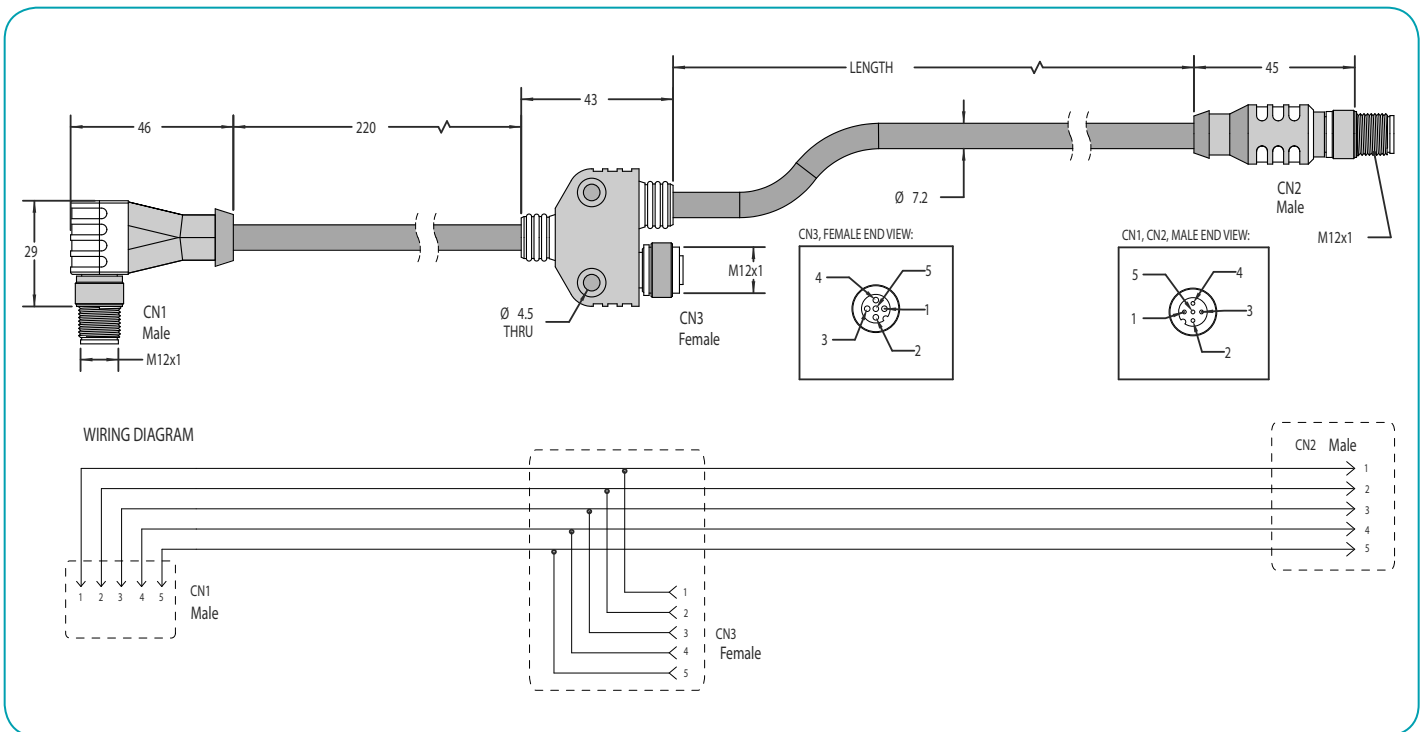

NOTE: At least one shunt resistor is required on ALL CAN bus networks. Please consult the factory for additional information.