


Enclosed Switch Mode DC Power Supply - 48 Volt

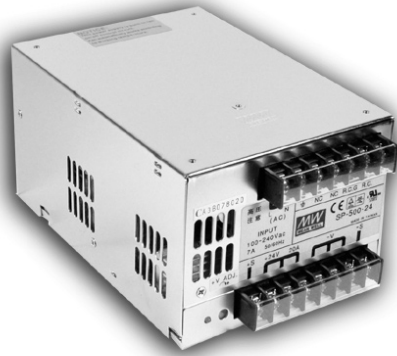

PFC500W-48 Features


- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- Protections: Short circuit / Overload/ Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- Built-in cooling fan ON-OFF control
- Built-in remote ON-OFF control
- Built-in remote sense function
- Fixed switching frequency at 110KHz
- 2 year warranty

OUTPUT	DC VOLTAGE	48V
	RATED CURRENT	10A
	CURRENT RANGE	0 ~ 10A
	RATED POWER	480W
	RIPPLE & NOISE (max) Note.2	3~mVp-p
	VOLTAGE ADJ. RANGE	41 ~ 56V
	VOLTAGE TOLERANCE Note.3	± 1.0%
	LINE REGULATION	± 0.5%
	LOAD REGULATION	± 0.5%
	SETUP, RISE TIME	1500ms, 50ms at full load
	HOLD UP TIME (Typ.)	24 ms at full load
INPUT	VOLTAGE RANGE Note.5	88 ~ 264VAC 124 ~ 370VDC
	FREQUENCY RANGE	47 ~ 63Hz
	POWER FACTOR (Typ.)	PF>0.95/230VAC PF>0.95/115VAC at full load
	EFFICIENCY(Typ.)	87%
	AC CURRENT (Typ.)	7A/115VAC 3.5A/230VAC
	INRUSH CURRENT (Typ.)	18A/115VAC 36A/230VAC
PROTECTION	OVER VOLTAGE	57.6 ~ 67.2V
FUNCTION	REMOTE CONTROL	RC+/RC-: Short = power on ; Open = power off
	WORKING TEMP.	-10 ~ +50 °C (Refer to output load derating curve)
	WORKING HUMIDITY	20 ~ 90% RH non-condensing
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, light industry level, criteria A
OTHERS	MTBF	133.4K hrs min. MIL-HDBK-217F (25°C)
	DIMENSION	170*120*93mm (L*W*H)
NOTE	<ol style="list-style-type: none"> 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance: includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. Derating may be needed under low input voltages. Please check the derating curve for more details. 6. See page 123 in the OEM Dynamics Catalog for shunts. 	

Enclosed Switch Mode DC Power Supply - 48 Volt



Mechanical Specifications

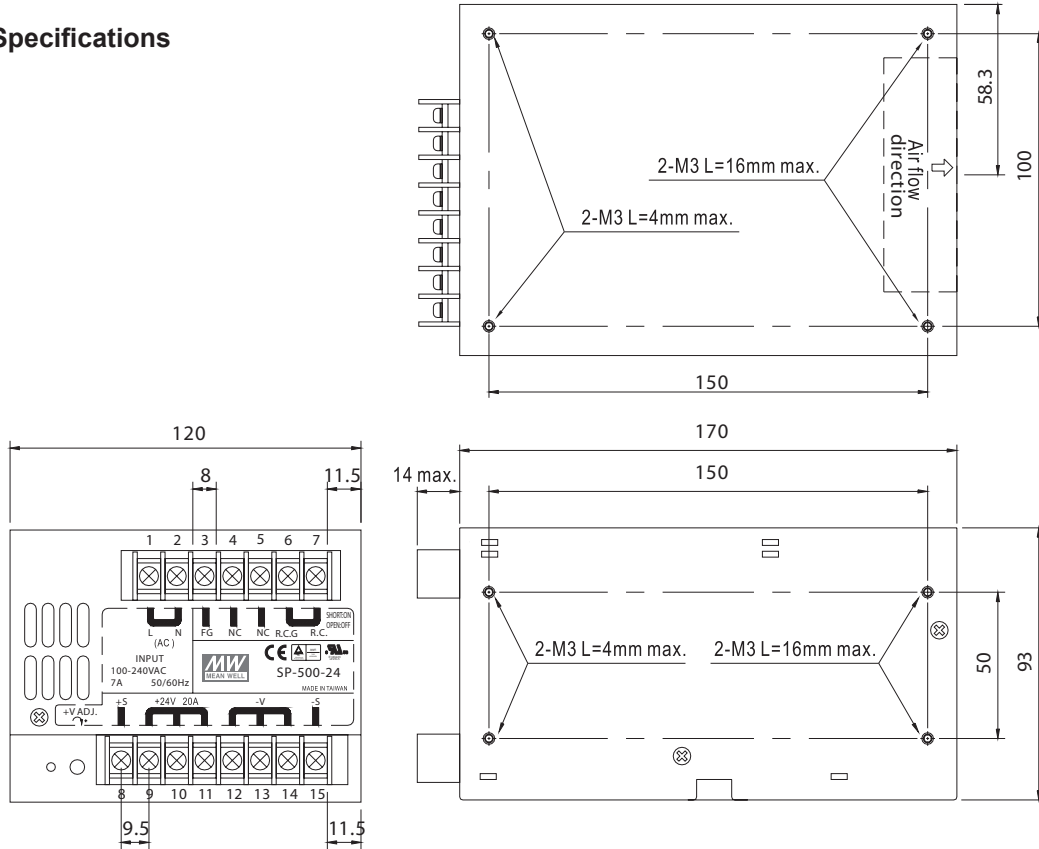

Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	7	R.C.
2	AC/N	8	+S
3	FG \perp	9~11	DC OUTPUT +V
4,5	NC	12~14	DC OUTPUT -V
6	R.C.G	15	-S

Output Derating VS Input Voltage

