


Drive and Control Power Cable

Main Power Input Cable supplies connection point to drive power and control power. This cable is required to power up all DC input sealed motors. Standard M16 threaded connector, brass pins with gold plating, maximum 12.0A, foil shield with black PVC jacket, ~7.4mm diameter.

Part Number	Description	Length
CBLIP-PWR4-FL-5M	Flight Lead Straight Connector	5 meters
CBLIP-PWR4-FL-5MRA	Right Angle Connector	5 meters

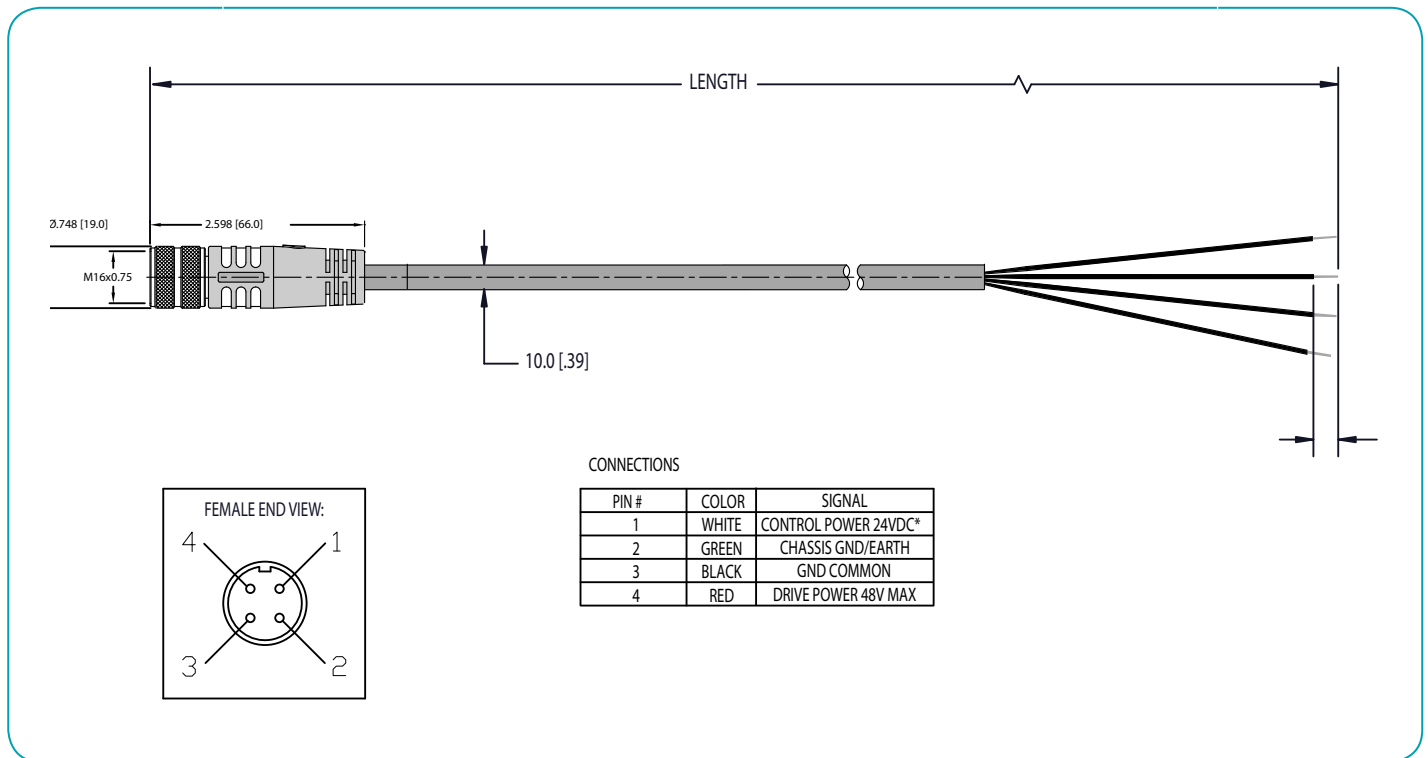

NOTE: Drive Power and Control Power are Separate Inputs. Control power is rated to a maximum range of 18 to 32VDC. Drive Power is from 18 to 48VDC max.

WARNING: Exceeding 32VDC into control power or any of the +24V pins could cause immediate damage to internal electronics. Exceeding a sustained voltage of 48V to pin 4 of the P1 Power pin could cause immediate damage to internal electronics. Exceeding these voltage limits will void the warranty.