
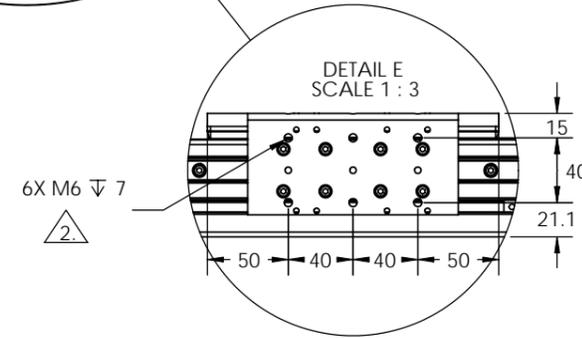
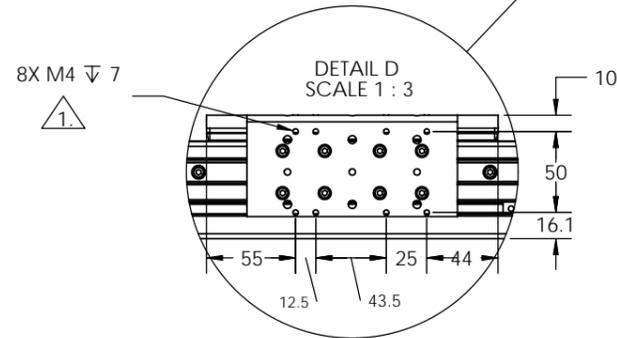

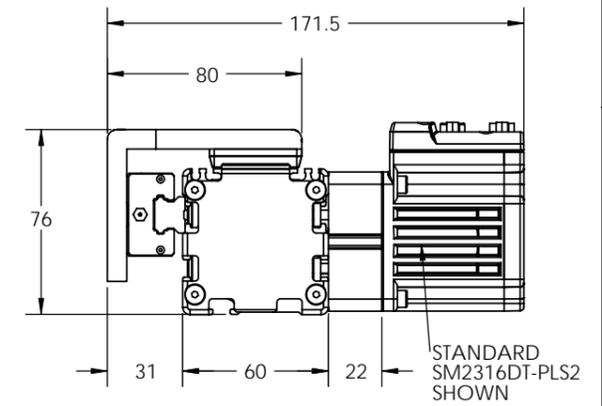
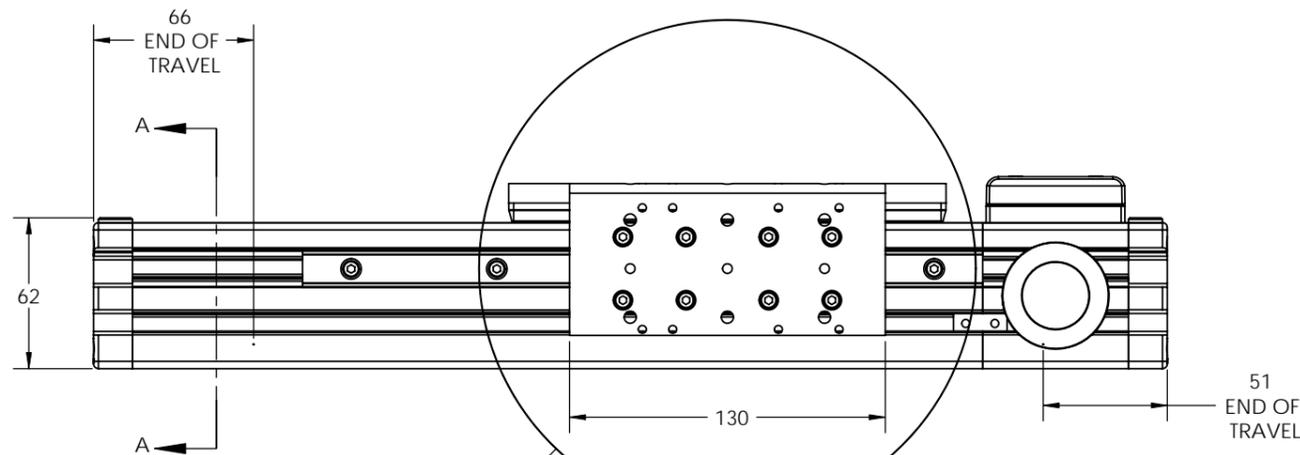
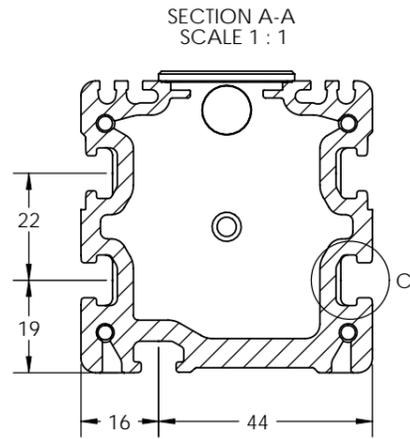


Additional Specifications for HLD60 with External Rail Bearing	
Parameter	Value
Motor	Animatics SM2316DT-PLS2, SM23165DT, SM2337DT-PLS2
Displacement/Rev.	2.5, 5, 10, or 12.5 mm/Rev available
Position sensors	Optional Home & EOT limits
Stroke	110 to 2800 mm
Over-travel (mm)	Contact factory for stroke above 2800mm
Unit mass (kg)	Approx 35
For additional performance, accuracy, and loading data please consult the online or printed catalog.	

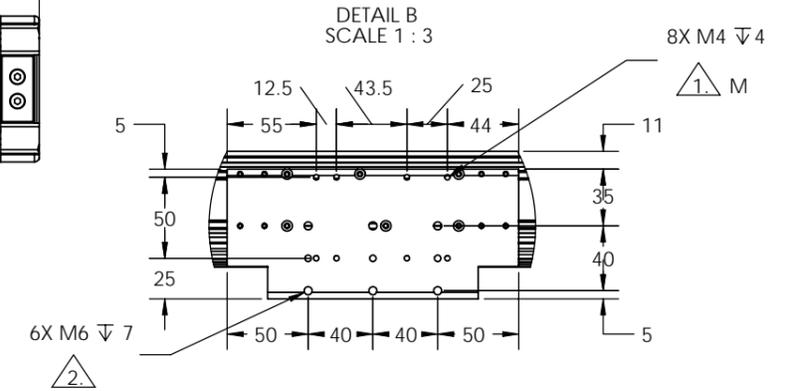

NOTES:

- 1. M4 x 50 x 12.5 and M4 x 25 x 50 for mounting L70 actuator.
- 2. M6 x 40 x 40 standard bolt pattern for optional mounting accessories.

California, USA www.OEMDynamics.com	
TITLE HLD60 with Single External Rail Bearing	
SIZE C	DWG NO H3-XXXX-XXXB-XXX-XXXXXXX
DO NOT SCALE DRAWING	REV 0
SCALE 1:2	SHEET 1 OF 1

REV. 0 DRAWN BY GS 4-8-2009